

PRODUCT SPECIFICATION 产品规格书

NF41100C

Touchless Basin Faucet

感应面盆龙头

(Rough-in Dimensions):

安装尺寸图:

(Unit): mm


单位: 毫米

Pressure range: 0.1-0.5MPa

水压范围: 0.1-0.5MPa

Best to use: 0.3MPa

最优水压: 0.3MPa

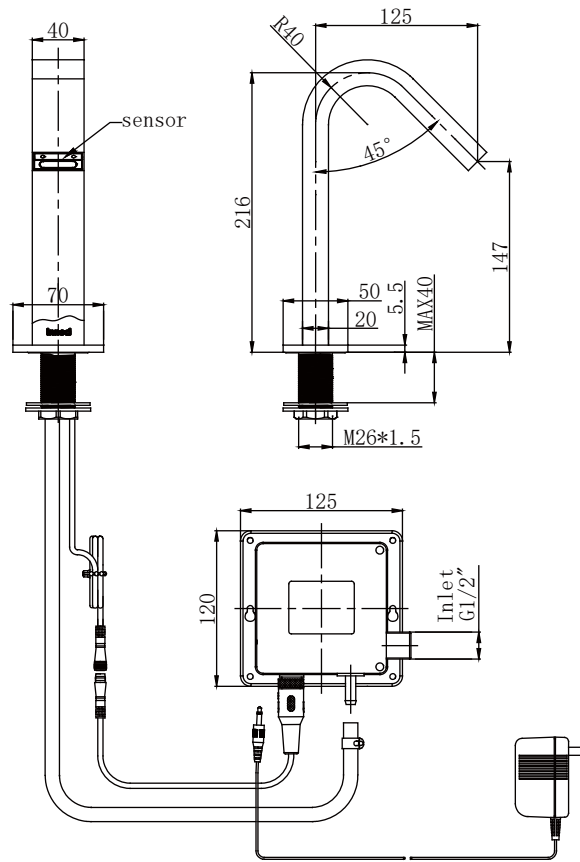

| | |
|---|---|
| Item No. 品号 | NF41100C |
| Available Color 颜色 | Chrome 铬色 |
| Materials 材质 | Brass 铜 |
| Aerator 起泡器 | Neoperl 纽铂 |
| Shipping Package 运输包装 | Set/CTN: 6 Set M ³ /CTN: 0.09 M ³ G.W/CTN: 13.5 kg 套/箱: 6套 体积/箱: 0.09 M ³ 毛重/箱: 13.5 kg |
| Remarks: Applicable power supply: DC 6V(Section 4 5 LR6 alkaline battery AC :220 -240 V 50/60 HZ, Working pressure range: 0.05 MPA-0.7 MPA, Induction distance: 25±2CM(aligned with standard whiteboard), Table opening size Φ35,0.3MPa±0.02MPa: 5.21L/min. 备注: 适用电源: DC6V(4节5号LR6碱性电池 AC:220-240V 50/60HZ 工作压力范围: 0.05MPa-0.7MPa, 感应距离: 25±2CM (对准标准白板), 台面开孔尺寸Φ35, 动态水压0.3MPa±0.02MPa: 5.21L/min. | |

INNOCI reserves the right to make changes or modifications on any of its products without advance notice.

INNOCI 艺耐公司保留不事先通知便改变或修改的权利

innoci[®]

Innoci Sanitary ware Co.,Ltd
www.innoci.com

Version:A0
版本:A0